

220

Tonne

All Terrain



MCLEOD

CRANES | HIABS | TRANSPORT
DRILLING RIG LOGISTICS
LIFT ENGINEERING & CONSULTANCY

Demag AC350-6 as 220

Lift Capacity: 220.0 Tonne
Boom Length: 64.0 m
Fly Length: 20 - 74.0 m

Main Hook Weight: 1050 Kg
Aux Hook Weight: 500 Kg
Line Pull: 11.5 Tonne

220 Tonne Rating Chart



15,5 – 72,0 m



8,5 m



360°



70 t



DIN/ISO

| m | 15,5 | 21,2 | 26,8 | 32,5 | 38,1 | 43,8 | 49,4 | 55,1 | 60,7 | 66,4 | 72,0 |
|------|----------------|-------|------|------|------|------|------|------|------|------|------|
| 2,5 | 220,0**/191,0* | | | | | | | | | | |
| 3,0 | 175,0 | 133,0 | | | | | | | | | |
| 4,0 | 134,0 | 125,0 | 90,0 | | | | | | | | |
| 5,0 | 117,0 | 111,0 | 90,0 | 68,0 | | | | | | | |
| 6,0 | 104,0 | 100,0 | 90,0 | 68,0 | 52,0 | | | | | | |
| 7,0 | 92,5 | 89,5 | 86,0 | 68,0 | 52,0 | 40,0 | | | | | |
| 8,0 | 83,0 | 81,5 | 78,5 | 68,0 | 52,0 | 40,0 | 30,0 | | | | |
| 9,0 | 74,5 | 74,5 | 71,5 | 65,5 | 52,0 | 40,0 | 30,0 | 23,5 | | | |
| 10,0 | 66,0 | 68,5 | 65,5 | 62,0 | 52,0 | 40,0 | 30,0 | 23,5 | | | |
| 11,0 | 57,5 | 61,0 | 59,5 | 59,0 | 50,5 | 40,0 | 30,0 | 23,5 | 18,0 | | |
| 12,0 | 47,5 | 54,5 | 53,0 | 54,0 | 48,5 | 38,5 | 30,0 | 23,5 | 18,0 | 14,0 | |
| 13,0 | | 49,5 | 48,0 | 49,0 | 46,0 | 37,0 | 29,0 | 23,5 | 18,0 | 14,0 | |
| 14,0 | | 45,0 | 43,5 | 44,5 | 44,0 | 36,0 | 28,0 | 23,5 | 18,0 | 14,0 | 12,0 |
| 15,0 | | 41,0 | 39,5 | 40,5 | 41,5 | 34,5 | 26,5 | 23,0 | 18,0 | 14,0 | 12,0 |
| 16,0 | | 38,0 | 36,5 | 37,0 | 38,0 | 33,0 | 25,5 | 22,0 | 18,0 | 14,0 | 12,0 |
| 18,0 | | 26,5 | 31,0 | 32,5 | 32,5 | 31,0 | 23,5 | 20,5 | 17,9 | 14,0 | 12,0 |
| 20,0 | | | 26,5 | 29,0 | 28,5 | 29,0 | 21,5 | 18,8 | 16,8 | 14,0 | 12,0 |
| 22,0 | | | 23,0 | 25,5 | 25,0 | 26,0 | 19,9 | 17,4 | 15,7 | 13,8 | 12,0 |
| 24,0 | | | | 22,5 | 22,5 | 23,0 | 18,1 | 16,1 | 14,7 | 13,4 | 11,9 |
| 26,0 | | | | 20,0 | 21,0 | 20,5 | 16,4 | 14,7 | 13,6 | 12,7 | 11,5 |
| 28,0 | | | | 17,4 | 19,1 | 18,3 | 15,2 | 13,6 | 12,6 | 11,9 | 11,1 |
| 30,0 | | | | | 17,3 | 16,5 | 14,2 | 12,5 | 11,7 | 11,1 | 10,6 |
| 32,0 | | | | | 15,7 | 14,8 | 13,5 | 11,4 | 10,8 | 10,3 | 9,8 |
| 34,0 | | | | | 12,7 | 13,2 | 12,9 | 10,4 | 10,0 | 9,6 | 9,1 |
| 36,0 | | | | | | 11,9 | 12,2 | 9,3 | 9,1 | 8,8 | 8,3 |
| 38,0 | | | | | | 10,7 | 11,6 | 8,6 | 8,3 | 8,0 | 7,8 |
| 40,0 | | | | | | | 9,3 | 10,5 | 8,2 | 7,4 | 7,2 |
| 42,0 | | | | | | | | 9,6 | 7,9 | 7,0 | 6,8 |
| 44,0 | | | | | | | | 8,7 | 7,6 | 6,5 | 6,4 |
| 46,0 | | | | | | | | 6,5 | 7,3 | 6,1 | 6,0 |
| 48,0 | | | | | | | | | 7,0 | 5,8 | 5,6 |
| 50,0 | | | | | | | | | 6,7 | 5,5 | 5,2 |
| 52,0 | | | | | | | | | | 5,3 | 5,0 |
| 54,0 | | | | | | | | | | 5,1 | 4,7 |
| 56,0 | | | | | | | | | | 4,8 | 4,4 |
| 58,0 | | | | | | | | | | | 4,2 |
| 60,0 | | | | | | | | | | | 3,9 |
| 62,0 | | | | | | | | | | | 3,6 |
| 64,0 | | | | | | | | | | | 2,9 |
| 66,0 | | | | | | | | | | | 2,5 |

Note: AC350 operating as GMK6220. Please specify requirements and AC350 will be setup to suit the lift.



The charts that have been included have been reproduced from manufacturer specifications, and while every effort has been made to ensure their accuracy, we do not accept any responsibility for errors or omissions.

220

Tonne



All Terrain

220

Tonne

All Terrain

220 Tonne Dimensions

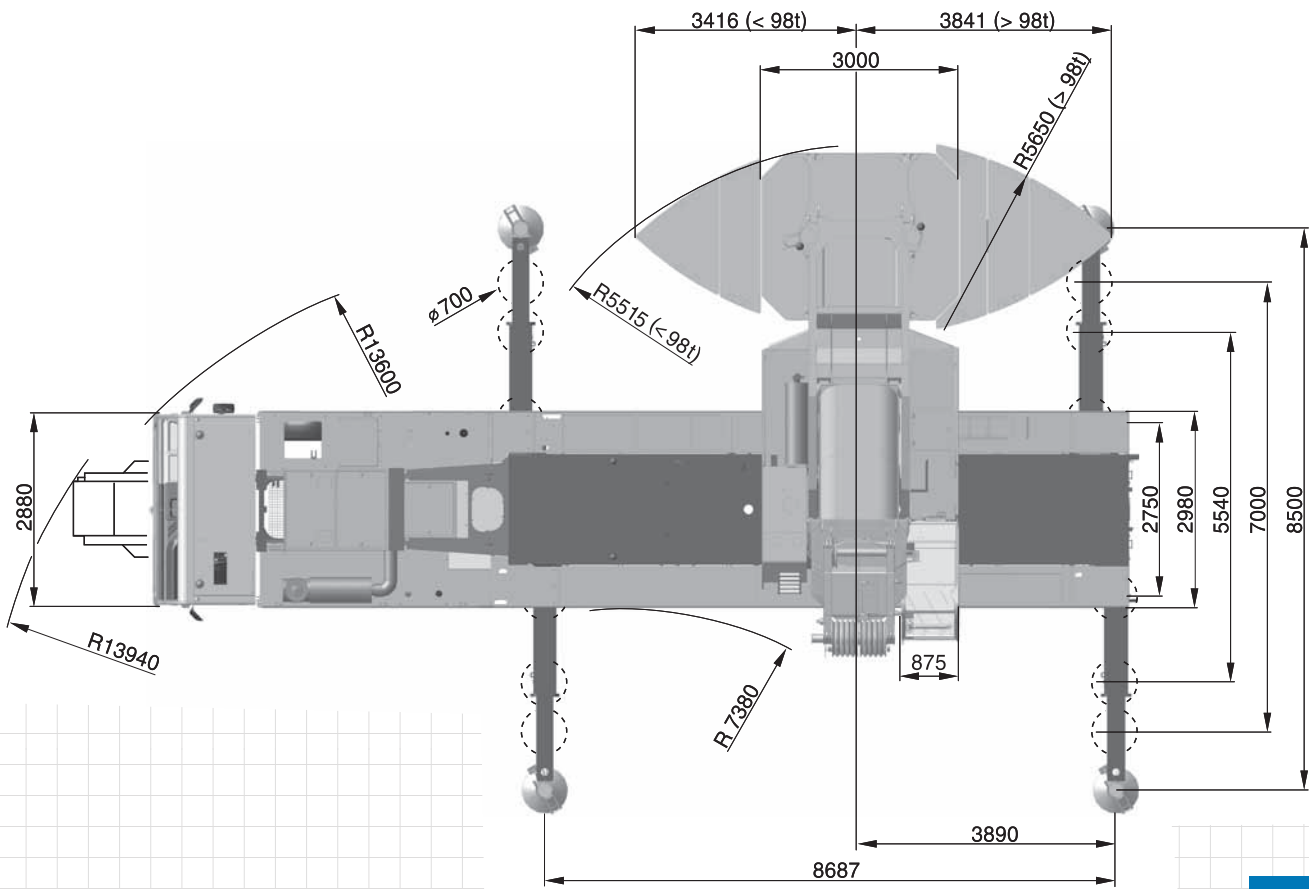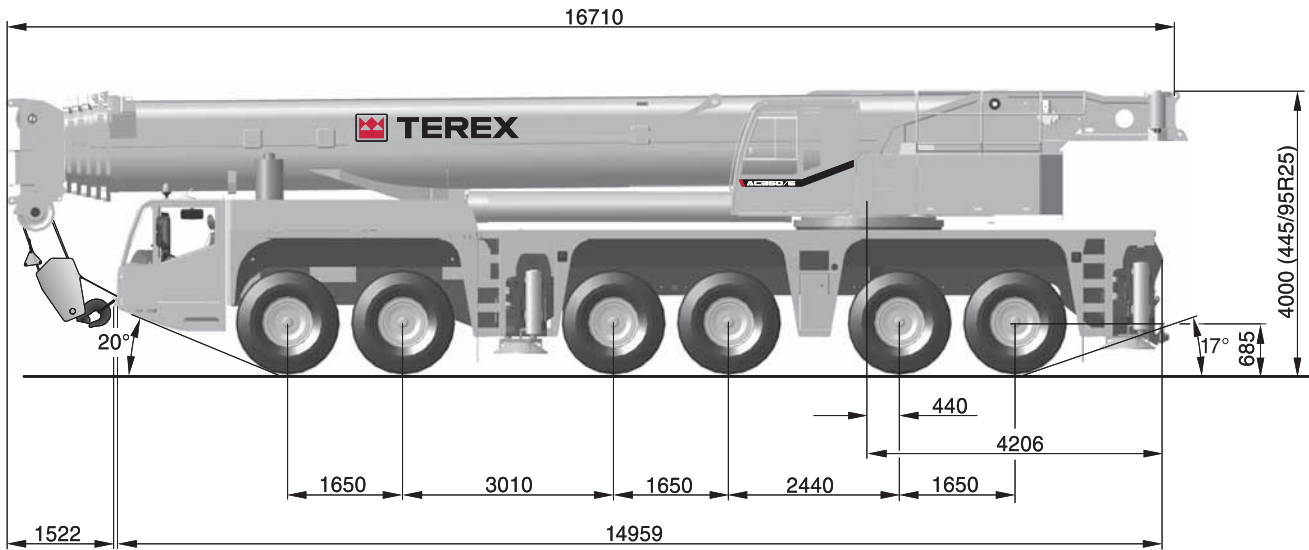

**Safety first.
McLeod first.**

220

Tonne


All Terrain

220

Tonne

All Terrain

220 Tonne Working Range

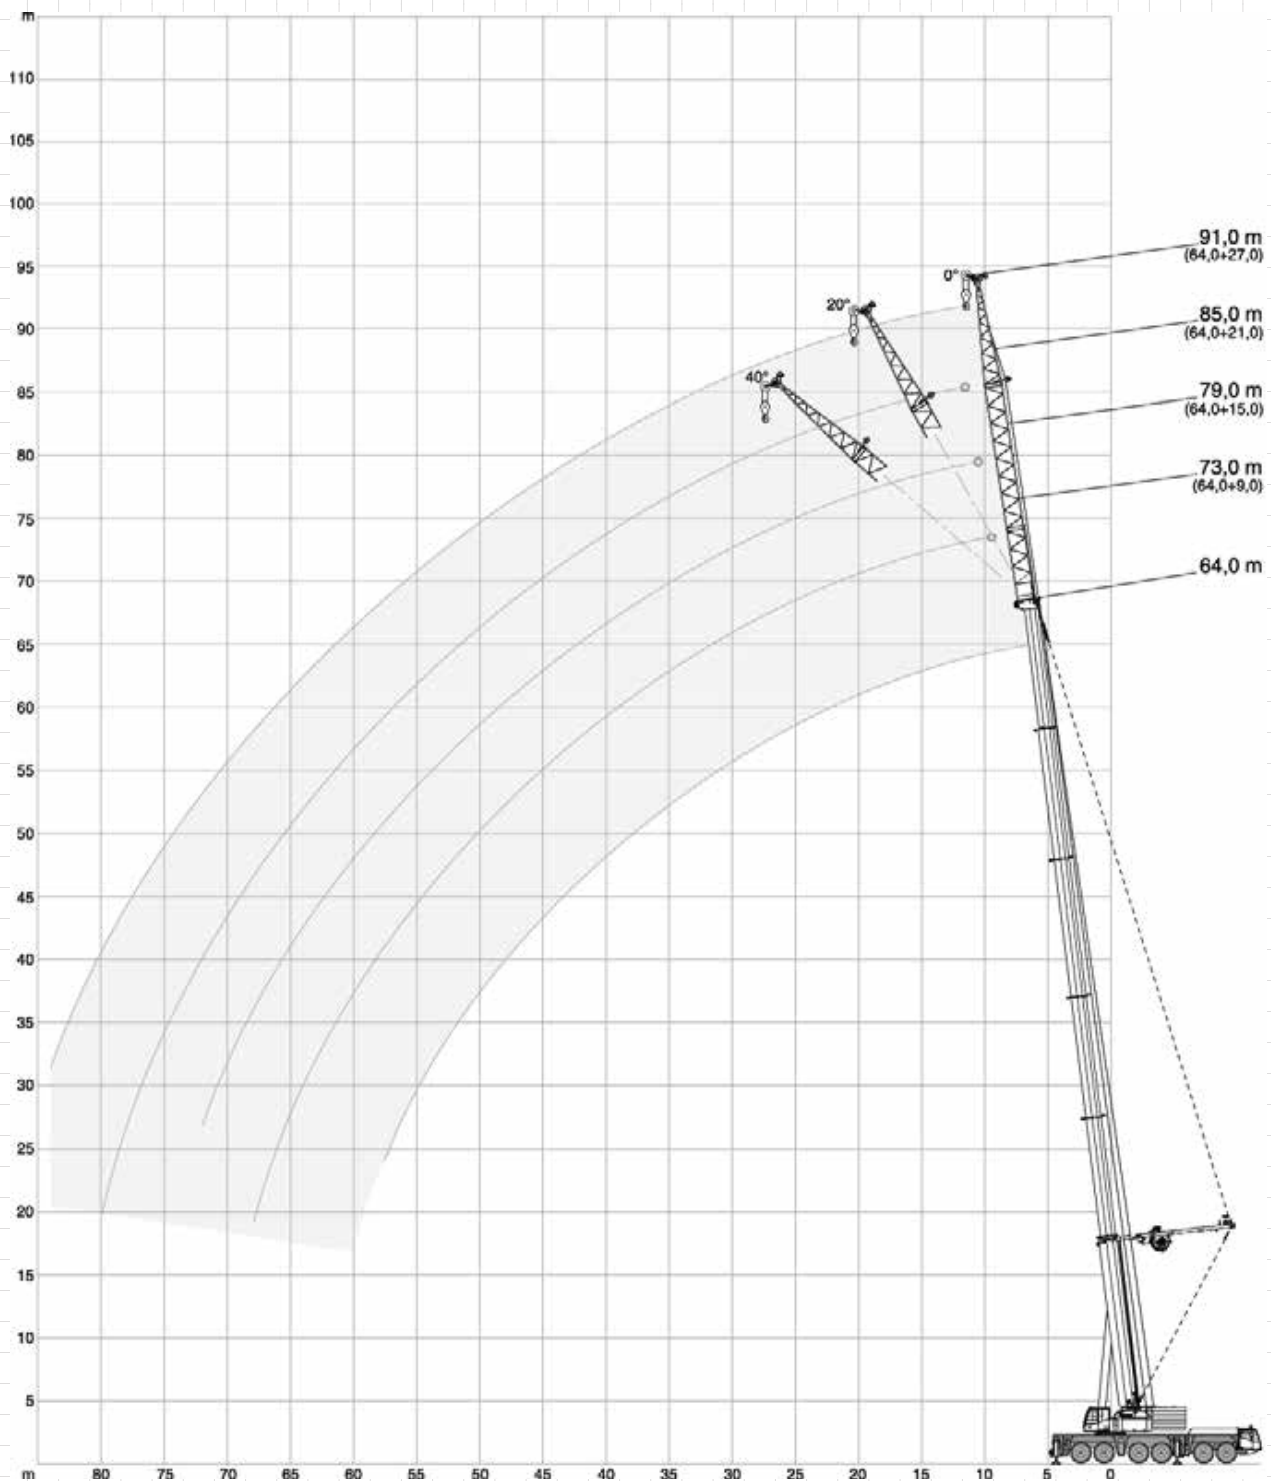

**Safety first.
McLeod first.**

220

Tonne

All Terrain